


Air Distribution Concepts

204 Hallberg St.,
Delavan, WI 53115
Website:
www.adctubes.com

Phone: 262.728.6860
Fax: 262.728.6840
Email: info@adctubes.com

Air Diffuser Fabric Options


Polyethylene

Polyethylene is resilient to most chemicals and will stand up to most air borne particles. It has a melt temperature of 180°F and can be cleaned by a spray hose nozzle and brush. Polyethylene is fire retardant and meets ASTM E-84 Class 1, AC 167, LC 1005. ICC-ES report :ESR-2646




300 D Polyester

Polyester is a premium grade coated fabric. It has a melt temperature of 350°F and can be laundered in small sections. Polyester is fire retardant meets ASTM E-84 Class 1, AC 167, LC 1005. ICC-ES report :ESR-2646

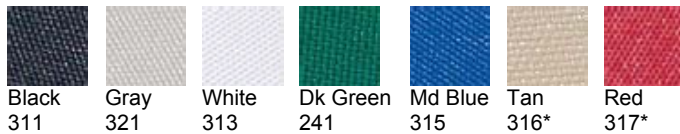


Anti-microbial Polyester

Polyester is a premium grade uncoated fabric with an antimicrobial agent. It has a melt temperature of 350°F and can be laundered in small sections. Polyester is fire retardant, meets ASTM E-84 Class 1 and is classified by UL.

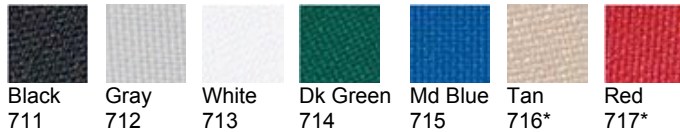

10 oz. Vinyl Coated Polyester

Vinyl is a coated fabric that will stand up to most air borne particles. It has a melt temperature of 180°F and can be cleaned by a spray hose nozzle and brush. Vinyl is fire retardant and meets ASTM E-84 Class 1.

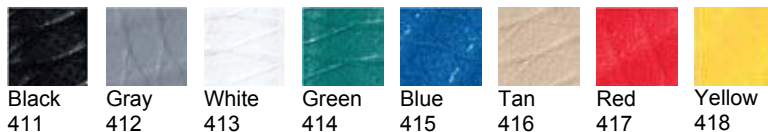

[Back to top](#)

XStatic Polyester

XStatic is an anti-static coated fabric that features an antimicrobial agent. It has a melt temperature of 250°F and can be laundered in small sections. XStatic is fire retardant and meets ASTM E-84 Class 1.




High Temp Fiberglass

High Temp Fiberglass is a coated fiberglass fabric that features a melt temperature of 500°F. It can also be used for other applications. The fiberglass is coated and can have air jets. High Temp fiberglass is fire retardant, meets ASTM E-84 Class 1 and is classified by UL.



Permeable Polyester

Polyester is a premium grade uncoated fabric. It has a melt temperature of 350°F and can be laundered in small sections. Polyester is fire retardant and meets ASTM E-84 Class A.

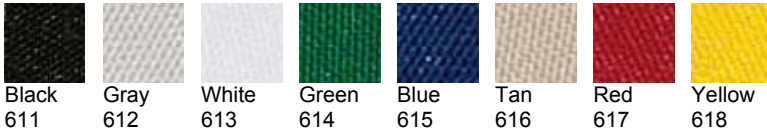

***Special order only.**

[Back to top](#)